

FUEL STORAGE – TRANSPORTABLE

TRANSCUBE GLOBAL



132 - 1,242 US GALLONS

The TransCube Global is a transportable, environmentally friendly double-walled fuel storage tank, that offers an efficient solution for onsite fueling and auxiliary supply.

With its fully transportable design and ability to fuel multiple pieces of equipment simultaneously, the TransCube will save you time and double or triple the run times of your equipment.

FEATURES

1. LOCKABLE EQUIPMENT CABINET

Equipment and ports are secure and spills are contained. Secure hose access enables fueling while cabinet is locked.

2. REMOVABLE INNER TANK

For routine cleaning, maintenance and inspection.

3. GALVANIZED FRAME

Strong, durable and secure structure with added protection from bumps and scratches.

4. DOUBLE WALLED, 110% CONTAINMENT

Built-in, weather-proof secondary containment eliminates the need for pans or basins.

5. CORNER BRACKETS


Liftable by crane and easily stackable: 2 high full and 3 high empty.

6. FOUR WAY FORKLIFT POCKETS

Quick and easy maneuvering and mobility.

7. INTERNAL Baffles

Designed to maximize stability when handling the tank full of fuel.

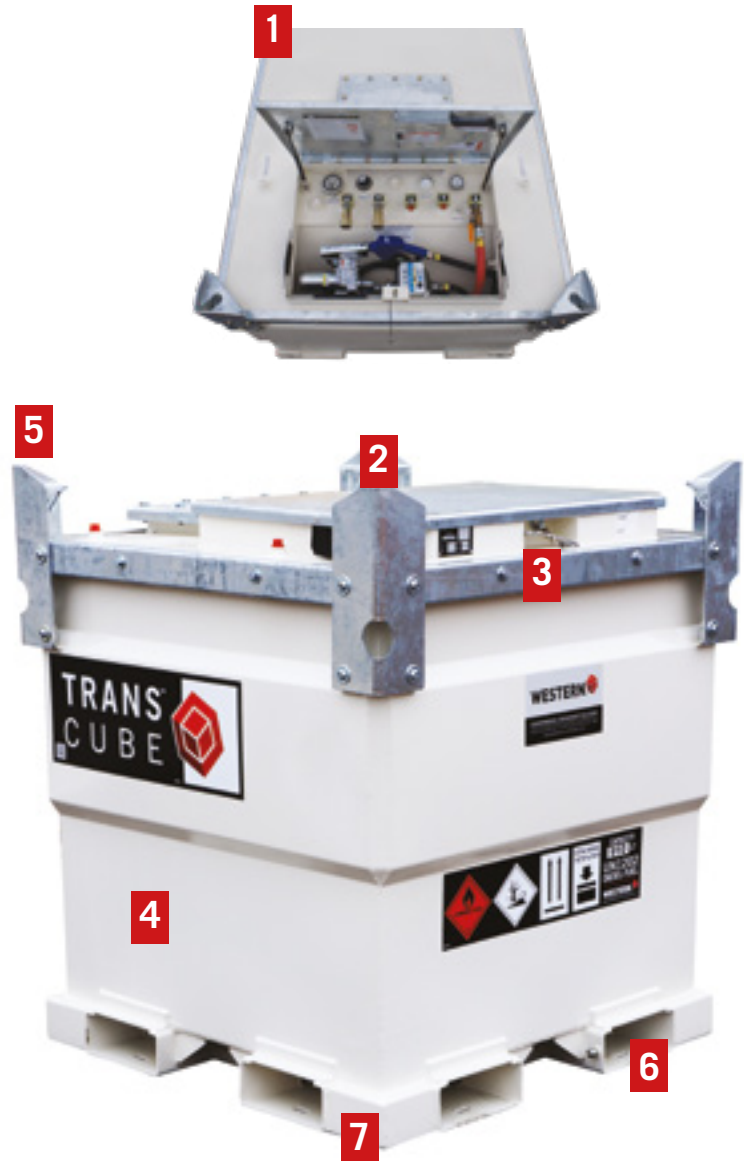

TRANS
CUBE



GLOBAL SERIES

IDEAL USES AND APPLICATIONS

ONSITE FUEL SUPPLY

Easily refuel machinery on site when needed and cut back on fuel delivery waiting times.







GENERATOR & AUXILIARY EQUIPMENT

TransCube fuel tanks have the ability to quickly and efficiently connect to 3 diesel powered pieces of equipment and refuel equipment via pump at the same time.

FUEL TRANSPORT

Meeting multiple worldwide transport regulations, the TransCube can transport fuel safely anywhere you need it.



| MODELS AND CAPACITIES |  |  |  |
|--|--|--|--|
| SPECIFICATIONS | 05TCG | 10TCG | 20TCG |
| CAPACITY (NOMINAL/SAFE FILL (95%)) | 132 / 125 US GALLONS | 251 / 238 US GALLONS | 552 / 525 US GALLONS |
| DIMENSIONS (L X W X H) | 45.31 x 45.31 x 33.66 IN | 45.31 x 45.31 x 52.17 IN | 90.31 x 45.35 x 52.13 IN |
| WEIGHT (EMPTY/ FULL) | 893 / 1,951 LBS | 1,131 / 3,199 LBS | 1,830 / 6508 LBS |
| DESIGN APPROVALS | UL142, CAN/ULC-S601, UN DOT TRANSPORT CANADA, ADR, AS-1692 2006, ADG, VLAREM, KIWA, NFPA | | |
| MODELS AND CAPACITIES |  |  |  |
| SPECIFICATIONS | 30TCG | 40TCG | 50TCG |
| CAPACITY (NOMINAL/SAFE FILL (95%)) | 787 / 748 US GALLONS | 999 / 949 US GALLONS | 1,204 / 1,144 US GALLONS |
| DIMENSIONS (L X W X H) | 90.39 x 60.87 x 52.09 IN | 90.87 x 90.87 x 44.84 IN | 90.87 x 90.87 x 52.13 IN |
| WEIGHT (EMPTY/ FULL) | 2,251 / 8,766 LBS | 3,417 / 12,024 LBS | 3,695 / 13,744 LBS |
| DESIGN APPROVALS | UL142, CAN/ULC-S601, UN DOT TRANSPORT CANADA, ADR, AS-1692 2006, ADG, VLAREM, KIWA, NFPA | UL 142, CAN/ULC-S601, NFCC Part 4, NFPA No.30, CSA B139, UN (Canada only), | UL142, CAN/ULC-S601, UN DOT TRANSPORT CANADA, ADR, AS-1692 2006, ADG, VLAREM, KIWA, NFPA |

